



[Home](#) » [Malware](#) » [IXESHE Derivative IHEATE Targets Users in America](#)

IXESHE Derivative IHEATE Targets Users in America

Posted on: **May 27, 2016** at 7:13 am Posted in: **Malware, Targeted Attacks** Author: **Trend Micro**



Since 2012, we've been keeping an eye on the **IXESHE targeted attack campaign**. Since its inception in 2009, the campaign has primarily targeted governments and companies in East Asia and Germany. However, the campaign appears to have shifted tactics and is once again targeting users in the United States.

We also noticed that there were some changes to the underlying behavior of the malware used. While there were some incremental improvements in the observed behavior of the new sample, the underlying pattern of behavior is similar to what we observed earlier from IXESHE.

These attacks targeting users in the United States used a variant of IXESHE which has been seen in Taiwan since 2009 named IHEATE. These showed some differences from known IXESHE variants: they had a different command-and-control (C&C) communication model and encryption methods.

One IHEATE sample we found contains the string "EMC112" as part of the C&C traffic. Such strings are frequently used to identify different campaigns. In this particular case, the 112 part of the string matched the malware sample's compilation date of January 12.

The sample we acquired connects to a C&C server whose domain was first registered in 2004, but whose information was modified in December 2015. This suggests that threat actors were able to pose as the original registrant and modify the information for their own needs.

Technical Analysis

IXESHE is a well-known targeted attack campaign which has mainly targeted East Asian governments, electronics manufacturers, and a telecommunications company in Germany. Other targets include G20 government officials as well as the *New York Times*. The campaign is known for targeting users with fake documents using exploits and right-to-left override (RTLO) techniques.

The particular sample we found has a SHA1 hash of 3de8ef34fb98ce5d5d0ec0f46ff92319a5976e63. We detect it as BKDR_IHEATE. Unlike common IXESHE variants which usually communicate with C&C servers via HTTP and a customized Base64-encoded payload, IHEATE communicates with C&C servers in the TCP layer. (HEATE is a command that is sent by some members of this family to servers that acts as a notice that it's still online; we derived the name IHEATE from this command and its ties to the IXESHE family.)

We have learned from IXESHE variants that even though the encryption routine changed in different variants but the decrypted messages are almost similar.

Information gathering

Once the backdoor is installed, it collects information on the victim's system and sends it to C&C server with the following format :

```
| [Computer name] | [User name] | [IP] | [OS version] | [Process ID or Tag]
```

Not all samples include a tag in their message. This tag could be a process ID, victim information, or the date when the malware was compiled. In this IHEATE sample, the tag is "EMC112". The 112 portion may refer to when the malware was compiled, as its compile date/time is 2016/01/12 03:22:27.

The threat actors behind IHEATE could use these tags to manage victims. The traffic back to their C&C servers could easily be sorted using these tags.

Sometime they slightly change the feedback format, such as

- Removing spaces: "[Computer name][User name][IP][OS version][Tag]"
- Changing the delimiter: "[Computer name] * [User name] * [IP] * [OS version] * [Tag]"

Featured Stories

[The Panamanian Shell Game: Cybercriminals With Offshore Bank Accounts?](#)

[Dark Motives Online: An Analysis of Overlapping Technologies Used by Cybercriminals and Terrorist Organizations](#)

[Crypto-ransomware Gains Footing in Corporate Grounds, Gets Nastier for End Users](#)

[SpyEye Creator Sentenced to 9 Years in Federal Prison](#)

[Indian Military Personnel Targeted by "Operation C-Major" Information Theft Campaign](#)

Recent Posts

[IXESHE Derivative IHEATE Targets Users in America](#)

[Say No to Ransomware With These Trend Micro Free Tools](#)

[Fake Bank App Ramps Up Defensive Measures](#)

[High-Profile Cyber Theft Against Banks Targeted SWIFT Systems](#)

[Will CryptXXX Replace TeslaCrypt After Ransomware Shakeup?](#)

Cybercrime Across the Globe: What Makes Each Market Unique?



This interactive map shows how diverse the cybercriminal underground economy is, with different markets that are as unique as the country or region that it caters to.

[Read more](#)

Business Email Compromise



A sophisticated scam has been targeting businesses that work with foreign partners, costing US victims \$750M since 2013.

[How do BEC scams work?](#)

Popular Posts

[Flashlight App Spews Malicious Ads](#)

[Locky Ransomware Spreads via Flash and](#)

Backdoor instructions

IHEATE provides a similar set of commands as most IXESHE variants. Note that the following list is case insensitive:

- /WINCMD %s – Launch command and get the output
- /GETCMD %s – copy cmd.exe and rename
- /DISK – List all disks
- /CD – get current directory
- /CD %s – change directory
- /DIR %s – browse directory
- /DEL %s – delete file
- /GETFILE %s – upload file
- /PUTFILE %s – download file
- /TASKLIST – list running processes
- /TASKKILL %s – kill a running process
- /SHUTDOWN – shut down the malware
- /SLEEP %s – sleep for specific period

Encryption

While IXESHE variants have fairly similar phone-home and backdoor routines, they have a wide variety of encryption routines. IHEATE is no different, and has its own unique behavior.

The traffic below simulates the traffic between a IHEATE-affected machine and its C&C server. Traffic from the client to the server is in red; traffic from the server to the client is in blue. The C&C server has sent a /DISK command to the machine.

```
00000000 36 59 6d 56 7c 22 b0 84 e8 44 a4 55 85 c7 61 8a
00000010 ed 25 7a 97
00000020 93 cb 96 0e 28 17 02 da df 1c 3e 12
00000030 49 5c 8f 08 aa
00000040 71 92 30 e7 ca 5a 29 63 f7 ec
00000050 7a e2 92 33
00000000 36 59 6d 56 7c 22 31 44 a3 a8 ea f1 11 42 f3 7a
00000010 8f 49 72 27 e1 2c 35
00000054 36 59 6d 56 7c 22 d1 18 16 80 5a d9 a9 05 b7 7d
00000064 d2 17 ac 7f 44 61 4d 6a 35 f2 37 53 cd 78 50 d2
00000074 55 da 94 2a 4e 24 c0 a1 88 a4 8f ed bf 3b ac 9d
00000084 ef eb 86 24 d8 d8 cb 8e b0 46 c7 d2 18 f9 f4 ba
00000094 6b ae a9 76 8e d1 23 d7 0f 1f 24 fb d7 1d 20 dc
000000a4 4d 4c e9 8a
000000b4 ea
```

Figure 1. Captured IHEATE network traffic

The first part of the network traffic is from the client to the C&C server. It is as follows:


1. The first six bytes make up the hardcoded portion of the encryption key. In this case, it is “36 59 6d 56 7c 22”. We have seen different encryption keys in other IHEATE variants; in some variants this part is ten bytes long.
2. The following eight bytes make up the randomly generated portion of the encryption key. Here it is “b0 84 e8 44 a4 55 85 c7”. In some samples, this portion is ten bytes long.
3. The next two bytes say how long the encrypted data is, here it is “61 8a”. The contents are encrypted with RC4, using the randomly generated encryption key.
4. Last is the data itself. This is also encrypted using RC4, with the hardcoded and randomly generated portions of the encryption key concatenated together.

The second part is the response of the server to the client. It is described as follows:

1. The encryption procedure is identical to that used by the client to talk to the server.
2. The six-bit hardcoded portion of the encryption key *must* be identical to the one used by the client earlier. Otherwise, if the keys do not match, the connection is dropped.

However, some newer IHEATE samples use yet another technique. These use asymmetric encryption:

1. Before communicating with C&C server, the malware client generates a random session key.
2. The client encrypts the session key using RSA-1024, using a public key hardcoded inside of malware.
3. The client encrypts the data to be sent using a custom encryption routine.
4. On top of this, the data sent to the C&C server is encrypted with RC4, using the previously generated session key,

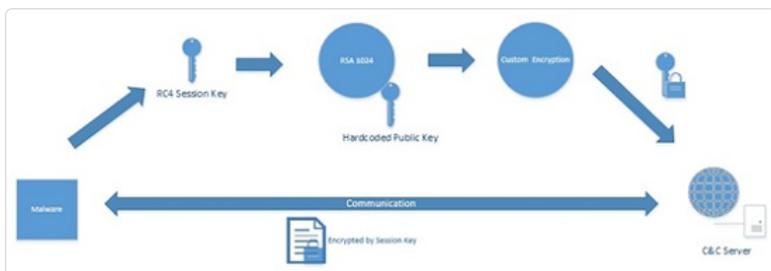

Windows Kernel Exploits
Hacking Team Flash Zero-Day Integrated Into Exploit Kits
New Crypto-Ransomware JIGSAW Plays Nasty Games
Pawn Storm Targets German Christian Democratic Union

Latest Tweets

Fight the good fight against #ransomware with these tools: bit.ly/1TZHWis about 59 mins ago

New post: IXESHE Derivative IHEATE Targets Users in America bit.ly/1THcWt8 @TrendMicro about 2 hours ago

Cerber #ransomware gets #DDoS component: bit.ly/1WZ2Q7W #cybersecurity about 5 hours ago

Stay Updated

Email Subscription



Your email here

Figure 2. Asymmetric encryption as used by IHEATE

File properties

The IHEATE sample with the “EMC112” identifier passes itself off as legitimate Media Player-related .DLL file, as can be seen below:

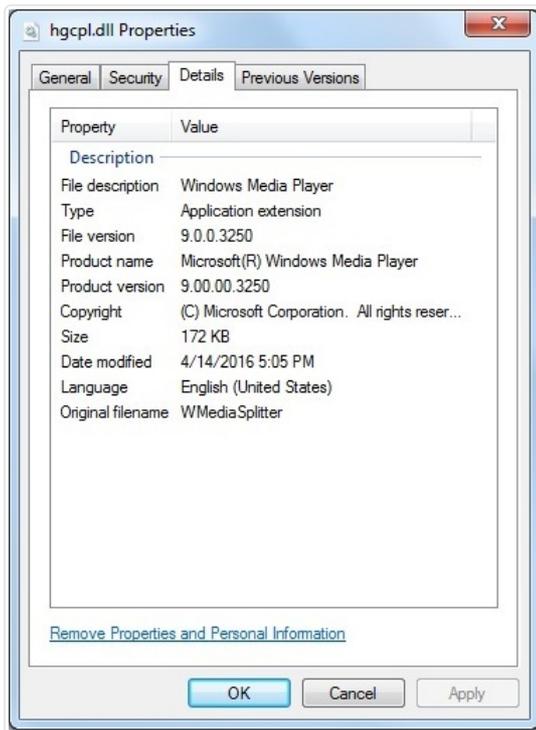


Figure 3. IHEATE pretending to be a Media Player .DLL file

C&C Servers

IXESHE was known for using compromised hosts for its C&C servers, and IHEATE behaves similarly.

The IHEATE sample with the “EMC112” identifier used the subdomain *cknew[.]abused domain[.]com* as the location of its C&C server. This domain appears to contain the personal blog of the original registrant, who has been using it since the domain was registered in 2004. We do not believe that the registrant is tied to IHEATE; instead we believe that his credentials were compromised so that threat actors could set up subdomains. This site was active briefly in the middle of 2015, but came back online at the start of 2016.

Other IHEATE samples showed interesting behavior as well. In one case, the attackers planted a fake C&C server address in the code:

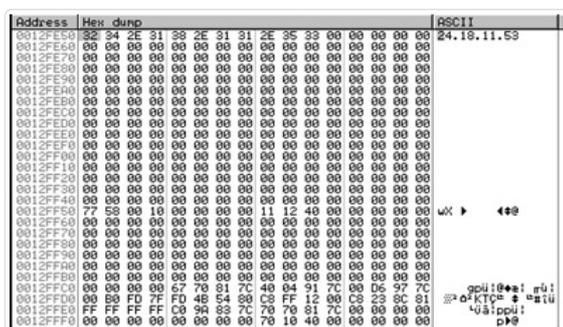


Figure 4. Fake C&C server in code

The address here is not an actual C&C address; instead it is used to calculate the port that the client will use (in this case, 443: (24*18)+11.) Other attacks are known to have used similar tactics as well.

Other domains used by IHEATE also overlapped with servers used by IXESHE. Two domains (*ipv6pro[.]root[.]jsx* and *gimeover[.]jpsp-moscow[.]com*) were used by IHEATE and resolved to the IP address *200[.]j93[.]j193[.]j163*. At approximately the same time, IXESHE also used the same server – except it did so by accessing the domain *skype[.]silksky[.]com*.

Conclusions

IXESHE and associated threats like IHEATE have not gone away, and they continue to evolve and change with the times. We will continue to monitor this threat and apprise our readers of any future developments.



Related Posts:

- [Shadow Force Uses DLL Hijacking, Targets South Korean Company](#)
- [DYRE Banking Malware Upsurges; Europe and North America Most Affected](#)
- [Pawn Storm Targets German Christian Democratic Union](#)
- ["Operation C-Major" Actors Also Used Android, BlackBerry Mobile Spyware Against Targets](#)



Say **NO** to ransomware.

Trend Micro has **blocked over 100 million** threats and counting

[ENTERPRISE »](#) [SMALL BUSINESS »](#) [CONSUMER »](#)

Tags: [IHEATE](#) [IXESHE](#)
[targeted attacks](#)

0 Comments [TrendLabs](#) 1 Login

[Recommend](#) [Share](#) [Sort by Best](#)



Be the first to comment.

[Subscribe](#) [Add Disqus to your site](#) [Privacy](#) **DISQUS**