

# Hussarini – Targeted Cyber Attack in the Philippines

By [Jasper Manuel and Rommel Joven](#) | July 08, 2018

Two weeks ago, FortiGuard Labs spotted a malicious document with the politically themed file name “Draft PH-US Dialogue on Cyber Security.doc”. This document takes advantage of the vulnerability [CVE-2017-11882](#). Upon successful exploitation, it drops a malware in the victim’s %temp% directory.

Our analysis of this malware shows that it belongs to *Hussarini*, also known as *Sarhust*, a backdoor family that has been used actively in APT attacks targeting countries in the ASEAN region since 2014.

According to reports, the Philippines is the **most exposed** country in ASEAN to the cyberattacks known as advanced persistent threats, or APTs. After several massive data breaches in 2016, the Philippines started to **invest** in beefing up their defences against cyberattacks. In spite of these investments, however, the Philippines is still among the **most prone** countries to be targeted by these sorts of APT attacks.

## Exploit Document

Our analysis begins with the exploit document named “Draft PH-US Dialogue on Cyber Security.doc” that takes advantage of the CVE-2017-11882 vulnerability. Upon successful exploitation, the malicious document file drops two files in the %Temp% directory.

- Outllib.dll
- OutExtra.exe

OutExtra.exe is a signed legitimate application from Microsoft named finder.exe. This file is part of the Microsoft Office suite and can be used to find keywords within Outlook data files. However, in this attack, this file is used to load the *Hussarini* backdoor via DLL hijacking.

DLL hijacking is a technique used by some APT malware in which instead of the legitimate application (.exe) loading the benign DLL, the application is tricked into loading a DLL containing malicious code. Using this technique, a malware can evade the Host Intrusion Prevention System (HIPS) of security programs that monitor the behaviors of executed files. Most HIPS tools whitelist signed or trusted files, thereby excluding any malware loaded using DLL hijacking by those signed files from any behavior monitoring. In the context of this attack, OutExtra.exe is a signed legitimate application; however, it is tricked into loading a malware file that is disguised as the legitimate Outllib.dll file.

## Decoy Document

To avoid suspicion by the victim, the exploit downloads a decoy document from the legitimate-seeming `hxxp://157.52.167.71:29317/office/word/2003/ph2/philip.varilla`. During our analysis, though, the download link for the decoy document was already down.

However, taking a look at the URI, we spotted several clues as to where/from whom the hacker possibly wants the user to believe the document came from. First is the “ph2,” which could mean “ph” for Philippines and “2” as its second directory of decoy documents. And second is “philip.varilla”. A quick Google search on this name led us to the Service Director of the Philippines Department of Information and Communications Technology (DICT), who has the same name. DICT is the agency responsible for the planning, development, and promotion of the Philippines’ information and communications technology including cybersecurity.

## Hussarini

In fact, the file Outllib.dll is actually the *Hussarini* backdoor, a DLL which exports functions containing the malicious code. When the file OutExtra.exe is executed, some of these functions are called, effectively executing its malicious code.

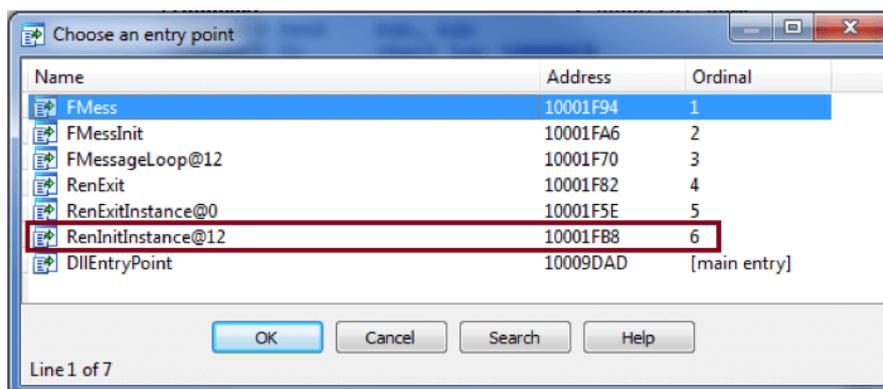


Fig 1. Hussarini export functions

While the original Outllib.dll also has some of the functions above, notice that this backdoor has a lot more exported functions than just the backdoor DLL.

Choose an entry point		
Name	Address	Ordinal
MAPIMHeapSize	3A5F5C3C	28
MAPIMHeapSize(x)	3A5F5C3C	29
OlkGetCharSet	3A52AAEF	30
OlkGetCharSet()	3A52AAEF	31
OlkGetCodepageUI	3A52AAE9	32
OlkGetCodepageUI()	3A52AAE9	33
OlkGetResourceHandle	3A494D44	34
OlkGetResourceHandle()	3A494D44	35
OlkGetUllangID	3A52AAF5	36
OlkGetUllangID()	3A52AAF5	37
OlkIsOmiMode	3A606F1B	38
OlkIsOmiMode()	3A606F1B	39
OlkLoadPrivateMAPI	3A606F20	40
OlkLoadPrivateMAPI(x)	3A606F20	41
OlkOnHelpAbout	3A69F78E	42
OlkOnHelpAbout()	3A69F78E	43
RenExitInstance()	3A568120	44
RenInitInstance(x,x,x)	3A423928	45
StdCoCreateInstance(x,x,x,x,x)	3A444D0A	46
XGetExplorerStoragePath(x,x,x,x)	3A42D570	47
DllEntryPoint	3A4404D8	[main entry]

Fig 2. Export functions of the original Outllib.dll file

There is also a big difference in the file size. The original Outllib.dll has a file size range of 4-8 MB, depending on the version, but the fake file only ranges from 40-50 KB. One of the reasons for this big difference in file size is that only one of the exported functions of the backdoor DLL contains the malicious code. All of the others are just RETN functions that do nothing.

Thus, we will focus our analysis on the function that contains the backdoor code named *RenInitInstance@12*. This function begins by instantiating a class initializing the setting of the bot. It then creates two concurrent threads taking the created object as its parameter.

```

10001FB8 ; Exported entry 6. RenInitInstance@12
10001FB8
10001FB8
10001FB8 ; Attributes: noreturn bp-based frame
10001FB8
10001FB8 public RenInitInstance@12
10001FB8 RenInitInstance@12 proc near
10001FB8
10001FB8 var_B4= byte ptr -0B4h
10001FB8
10001FB8 push    ebp
10001FB9 mov     ebp, esp
10001FB8 sub     esp, 0B8h
10001FC1 call   sub_10001ED5
10001FC6 push   offset unk_1000BB44
10001FCB push   0
10001FCD call   _wsetlocale
10001FD2 add     esp, 8
10001FD5 push   3E8h ; dwMilliseconds
10001FDA call   ds:Sleep
10001FE0 lea    ecx, [ebp+var_B4]
10001FE6 call   __init__
10001FEB lea    ecx, [ebp+var_B4]
10001FF1 call   create_thread_01 ; client thread
10001FF6 lea    ecx, [ebp+var_B4]
10001FFC call   create_thread_02 ; worker thread
10002001 push   0 ; uExitCode
10002003 call   ds:ExitProcess
10002003 RenInitInstance@12 endp
10002003

```

Fig 3. Hussarini main function

The first thread acts as a client thread that is responsible for communicating with the command and control (C&C) server and listening for commands. The response is then parsed and passed to the second thread that acts as the worker. The worker thread executes the commands and reports the result to the client thread.

Before communicating with its command and control (C&C), the malware saves a *ServerID* in the registry with a randomly generated value. This ID identifies this bot in the botnet.

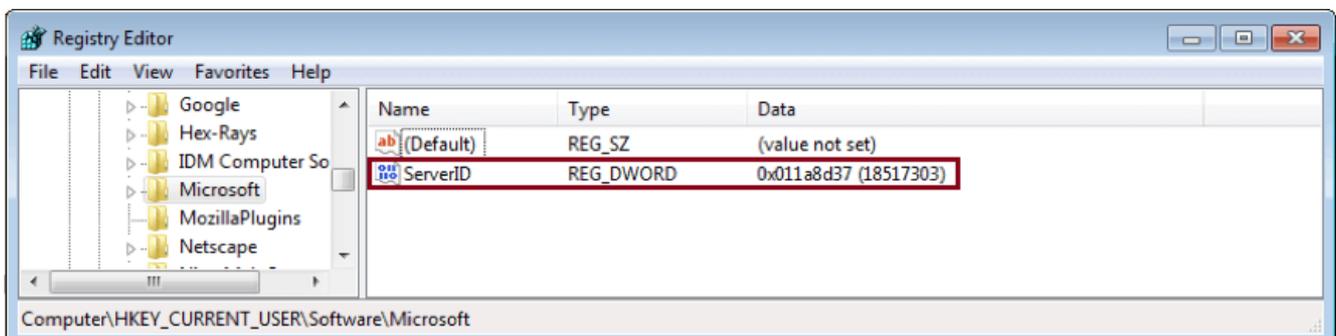


Fig 4. Bot ServerID

## C&C Communication





- `tasklist -v` – list of apps and services with their Process ID (PID) for all task running
- `net start` – starts any of the various services that are running
- `net view` – displays the other computers that are visible on the network
- `dir "c:\users" /o-d` – displays all users

After sending these `cmd` commands, the C&C stopped responding. It could be that the hacker decided to block the connection after seeing the result of these commands.

Based on its code, this malware is capable of executing the following commands from the hacker:

- Create, read, write files
- Download and execute files/components
- Launch remote shell using `cmd.exe`

While other APT backdoors have more capabilities, such as keylogging, taking screen shots, etc., Hussarini only has few, including the capability to download and execute files/components. However, its functionality can be extended by the hacker. Also, since this backdoor can launch a remote `cmd` shell, all `cmd` commands are available for the attacker to use, such as those seen in Figure 11.

*Hussarini* uses a dynamic domain to maintain anonymity and to also possibly be able to change the C&C server IP address. At the time of this analysis, however, we only saw it resolved to the IP address 157.52.167.71, which is the same IP used to host the decoy document.

publicdfaph.publicvm.com domain information	
Passive DNS Replication ⓘ	
Date resolved	IP address
2018-06-25	157.52.167.71

Fig 12. C&C domain name resolution

## Final thoughts

We are unsure how the document is being distributed; however, taking a look at the C&C domain name [publicdfaph.publicvm.com](http://publicdfaph.publicvm.com) and considering the file name of the exploit document “Draft PH-US Dialogue on Cyber Security.doc” and the clues from the decoy document download link `hxxp://157.52.167.71:29317/office/word/2003/ph2/philip.varilla`, there is one scenario that seems to make the most sense.

It seems likely that the names used were crafted to make it look like the document came from the Department of Information and Communications Technology (DICT), or possibly from the Service Director, which would imply that the employees of the Department of Foreign Affairs (DFA) are the target. Clearly, the use of *publicdfaph* in the C&C domain name is used to camouflage the traffic and to trick a network administrator into thinking that this domain is under DFA so as not to raise any suspicion.

## Conclusion

Hussarini was first mentioned in APT campaigns targeting the Philippines and Thailand in 2014. Today, this malware is still actively being used against the Philippines. The Department of Information and Communications Technology was only formed in 2016 and has **acknowledged** that the Philippines' state of cybersecurity is still in infancy. In general, this contributes to the Philippines continuing to be a target for cybercrime/cyberespionage or even state-sponsored attacks. Because of this, we expect that attacks targeting that region will continue to evolve in both quantity and quality. As always, we here at FortiGuard Labs will continue to monitor events in order to hunt for, catch, and block these attacks.

## Solution:

Fortinet detects the exploit document as MSOffice/CVE\_2017\_11882.A!tr and the Hussarini samples as W32/Sarhust.D!tr. Malicious URLs related to this malware are also blocked by FortiGuard Web Filtering Service.

-- FortiGuard Lion Team --

## IOCs:

### SHA256:


154261a4aab73f1ceef28695d8837902cc1e8b5cca0b8fc81ddeda350564adc0 -  
MSOffice/CVE\_2017\_11882.A!tr

05dcc7856661244d082daa88a074d2f266c70623789a7bb5a919282b178d8f98 - W32/Sarhust.D!tr

### CC:

hxxp://157.52.167.71:29317/office/word/2003/ph2/philip.varilla

hxxp://publicdfaph.publicvm.com:8080/

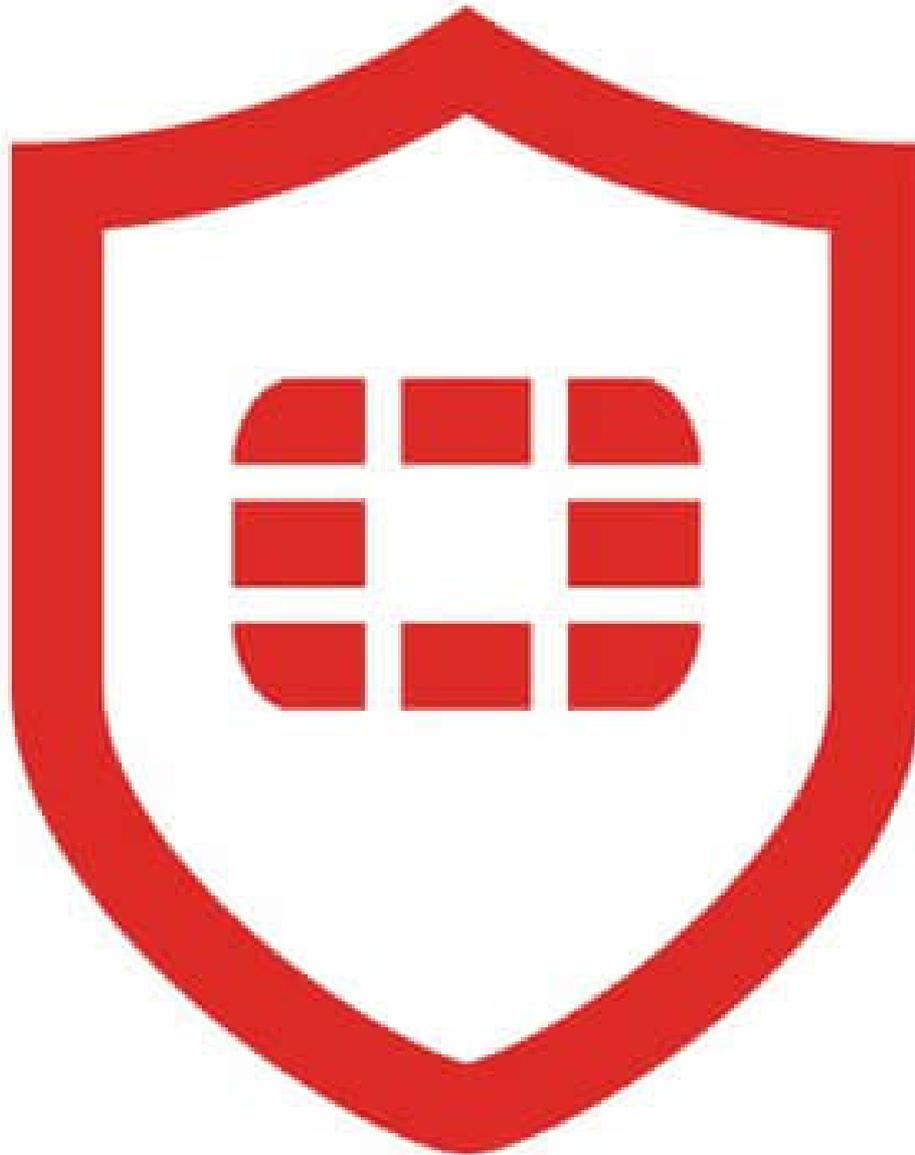

Check out our latest [Quarterly Threat Landscape Report](#) for more details about recent threats.

[Sign up](#) for our weekly FortiGuard Threat Brief or for our FortiGuard Threat Intelligence Service.

Tags: [apt](#), [APT Campaign](#)

---

## Related Posts

## THREAT RESEARCH

Rehashed RAT Used in APT Campaign Against Vietnamese Organizations

## THREAT RESEARCH

A Deep Dive Analysis of the FALLCHILL Remote Administration Tool

THREAT RESEARCH

New Ransomware Follows WannaCry Exploits

---

## Join the Discussion

Comments for this thread are now closed.



0 Comments

FortinetBlog

Login ▾

Recommend

Share

Sort by Best ▾

This discussion has been closed.

---

[Subscribe](#) [Add Disqus to your site](#) [Add Disqus](#) [Disqus' Privacy Policy](#) [Privacy Policy](#) [Privacy Policy](#) [Privacy Policy](#)

## News & Articles

[News Releases](#)

[News Articles](#)

[Trademarks](#)

## Security Research

[Threat Research](#)

[FortiGuard Labs](#)

[Threat Map](#)

[Threat Briefs](#)

[Ransomware](#)

## Connect With Us

[Blog](#)

[Fuse](#)

## Company

[About Us](#)

[Why Fortinet](#)

[Security Fabric](#)

[Exec Mgmt](#)

[Careers](#)

[Certifications](#)

[Events](#)

[Industry Awards](#)

## Contact Us

[\(866\) 868-3678](#)